

William Roberts Vintage



3/4 Pipe Clothing / Garment Double Rack

Assembly Directions

You will need 2 people to correctly assemble the Clothing Rack and a Pipe Wrench.

You will also need cloth to help prevent these tools from damaging pipe surfaces. You will need two strong people to hold and tighten pipe fittings.

1. Lay Pipe (A) with elbow fittings on floor.
2. Attach both (B) pipes into elbow fittings on each side of the (A) pipe. Make them tight with pipe wrench.
3. Slide (E) Pipe with oversized T's on both B Pipes
4. Attach both (BL) Pipes to (B) pipes with coupler side. Make them tight with pipe wrench. Make sure both T fittings are facing each other. All pipes should be flat on floor.
5. Undo Union (if necessary) (sometimes ship with union together) and Attach both (C) pipes with union to each T fitting. Make both tight with pipe wrench. Make sure all pipes are lying flat on the floor. Adjust if needed
6. Screw Union Fitting together and tighten. Now you should have a square / rectangle shape.
7. Rotate so the bottom of the T fitting is pointing upward. Screw legs (D) into T fitting. Make sure legs are tight and 90 degrees from base. Adjust as needed.
8. Rotate Upright and (E) Pipe will slide down and rest on the couplers. Make sure (E) pipe slides down evenly to avoid becoming wedged.

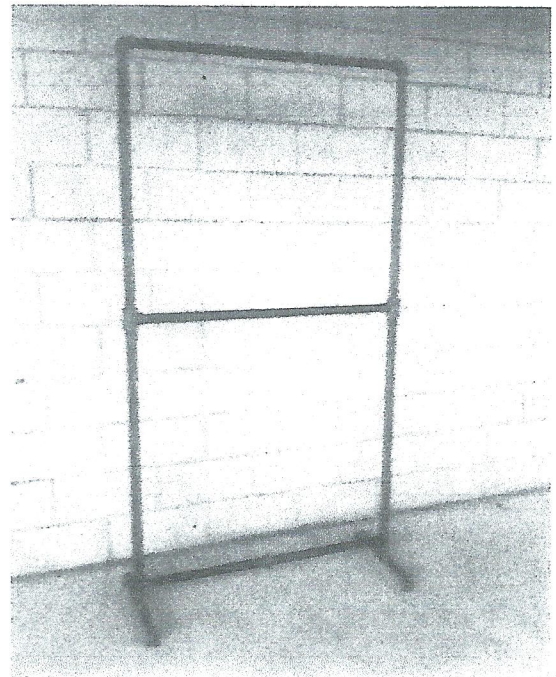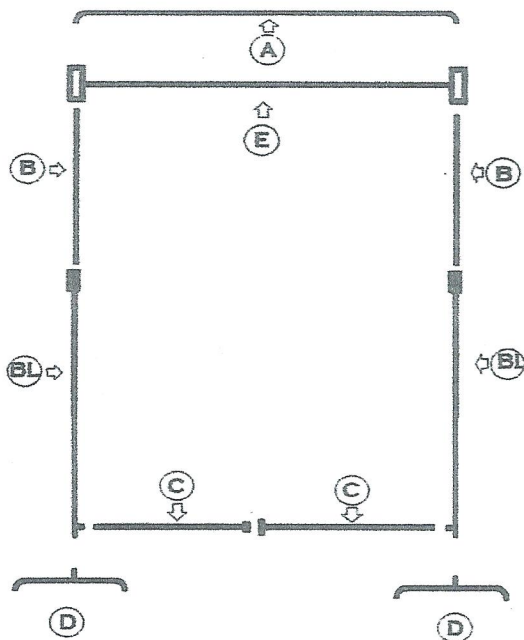

Revised 9.2013