


# Double Shelf Pipe Rack



# Step 1

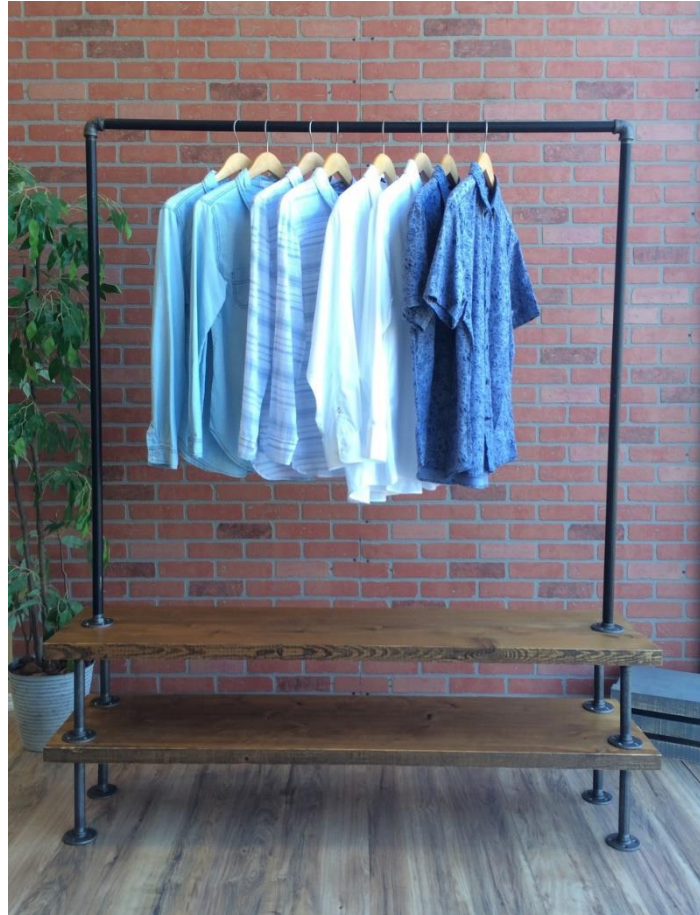

- Open padded bags that contain small pipes and flange fittings. Screw flange fittings onto one side of each small pipe. There are two extra flange fittings that will be used in Step 3.
- Thread all small pipes into flanges that are attached to shelves.
- NOTE: Flanges on one of the shelves are loose. Leave these loose until the next step.
- Hand tighten the small pipes to the shelf that has the flanges that are tight. This will be how you level the rack.

## Step 2



- Place the shelf with the loose flanges on top of the board that has the tight flanges.
- Using the small screws align the holes in the short pipes with the pre drilled holes on the shelf.
- Tighten all the bottom screws and then tighten the top flange screws that were loose in the previous step.




## Step 3



- Screw one flange fitting on each vertical bar (Vertical bars are threaded at both ends).
- Assemble clothing rack by screwing together the two vertical bars into the top hang bar (hang bar has two elbow fittings on each end).

## Step 4

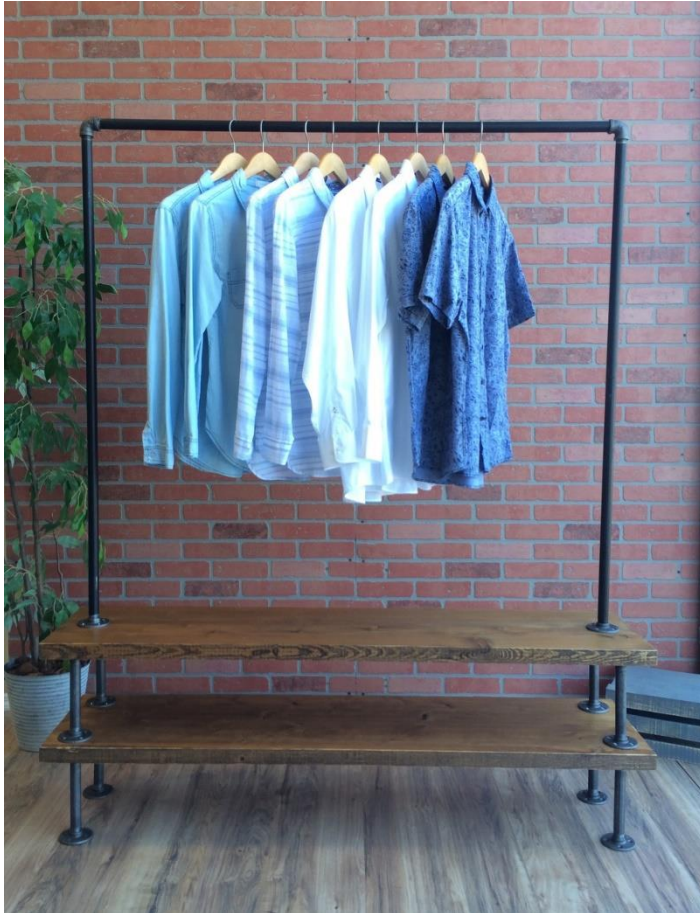

- Place clothing rack on top of wood shelves.
- Align the flange fitting holes with the pre drilled holes on the top shelf. You may need to tighten or loosen the vertical bars or flange fittings so the holes align.
- Attach clothing rack with provided 1 ½" screws using Philips head screw driver or drill.
- If needed, level the rack by tightening or loosening small pipes on the bottom of the rack.

# Enjoy

